


a.s.k. TECHNOLOGIES

MOLD MONITOR SYSTEM

- Utilizes a camera to detect absence and presence of parts on the mold.
- User friendly and easy to operate. Rapid setup and job recall when changing molds.
- Prevents mold crashes, saving thousands in costly repairs.
- Can reduce cycle time and also reduce wear and tear on the mold by reducing ejector strokes.
- Detects 16 cavities; Can go up to 32 upon request.
- 1 picture or 2 picture versions available.
- Compact design; can be mounted directly to the side of the press. Touchscreen PC is mounted on ergonomic swivel hinge for multiple viewing angles.
- Camera is also mounted using a swivel hinge for adjustability. Also included with a 4-12mm adjustable zoom lens for larger and smaller molds or cavities.
- Easily adjust thresholds for each individual cavity.
- 4 interface wires are all that are required to connect the system into the press.
- Training available for operators; Certificates provided for those who complete the training.

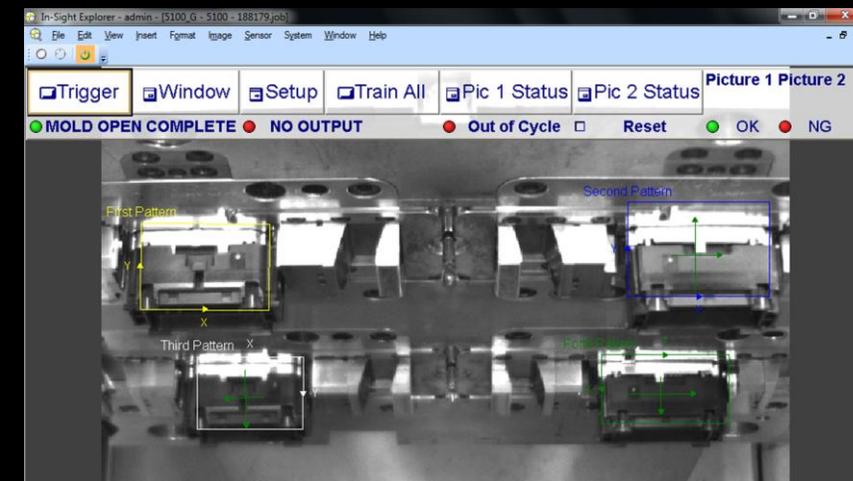

a.s.k.
TECHNOLOGIES